FOX LUX
EMERGENCY LIGHTING

FXEXBS-M-3-BLK SELF-TEST* LED EMERGENCY EXIT BLADE

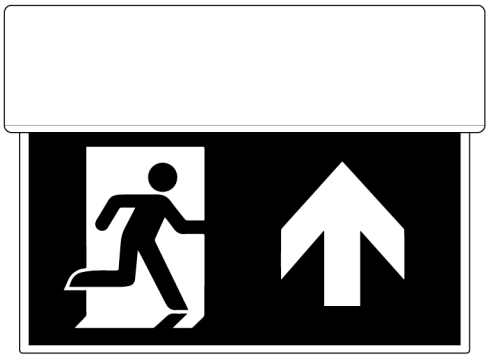

Technical Data

Model Variant	FXEXBS-M-3-BLK
Rated Supply Voltage	220-240V AC
Mains Frequency	50 / 60 Hz
Max. Power Consumption	5W
Standby Power	< 0.5W
Emergency Output Power	1.5W nominal
Rated Emergency Duration	3 hours
Battery Charge Time	< 16 hours
Operating Temperature	0 to 40°C
Insulation Class	Class II
Ingress Protection	IP20
Impact Protection	IK 06
Dimensions (L x W x H)	341 x 247 x 46 mm
Battery Compatibility	1 x 18650 Li-ion 3.6V 2.5Ah
Battery Code	FXC3.6-2500-A35
LED Configuration	EVERLIGHT 2835

IMPORTANT NOTE: This self-test luminaire is configured to manual test mode by default.
If self-test mode is required, it should be activated via remote control (ref.: REM-E1).
With this feature enabled, functional and duration tests are conducted according to BS EN 50172:2004
This product is compatible with our infrared remote control. See product REM-E1 for more details.
To optimise long-term battery performance, the luminaire will operate for 3 hours before automatically shutting down.
The battery must be recharged within 6 months of full discharge.
When the rated operational time is no longer reached after a full recharge, the battery must be replaced.

hello@fox-lux.co.uk
www.fox-lux.co.uk
+44(0)1543 396400
Fox Lux Ltd., Unit 17 Britannia Way, Lichfield WS14 9UY

FOX LUX
EMERGENCY LIGHTING

FXEXBS-M-3-BLK SELF-TEST* LED EMERGENCY EXIT BLADE

Indicator LED Status

GREEN LED	RED LED	STATUS
On	Off	Standby
Slow Flash	Off	Charging
Fast Flash	Off	Function test or duration test in progress
Off	On	Battery disconnected / Duration test failed
Slow Flash	Slow Flash	Battery temperature out of operational range
Off	Slow Flash	Light source fault

NOTE: “Slow Flash” = 1 flash per second. “Fast Flash” = 2 Flashes per second

Installation Guide

1 Remove Product from Packaging

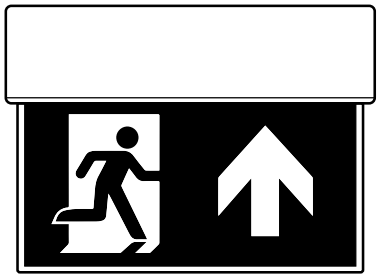

2 Remove Mounting Base

Unscrew the two screws and remove the mounting base.
Prepare conduit or cable entry points as required.



3 Install Mounting Base

Using either the ceiling or wall installation holes, secure the base to the mounting surface with appropriate hardware.

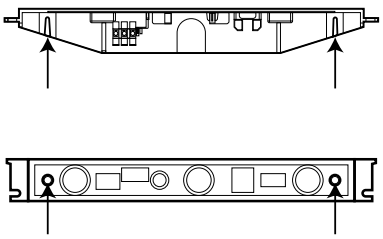

4 Connect to Power Supply

Terminate mains supply as indicated.

Terminals suitable for cable size
0.75 to 1.5 mm2
Insulation strip length of 8 mm

N- neutral (Blue)
L- Live (Brown)
SL- Switched live (Black)



5 Complete Labels

Complete battery and luminaire labels.

FOX LUX
Part No.
X | 1 | | 180
Commissioning Date:__ /__ /____

FOX LUX
Part No.
Date Of Manufacture MM/YYYY
Commissioning Date:___ /__ /____

6 Attach Body to Base

Slide the luminaire on to the mounting base and replace the two screws to secure.

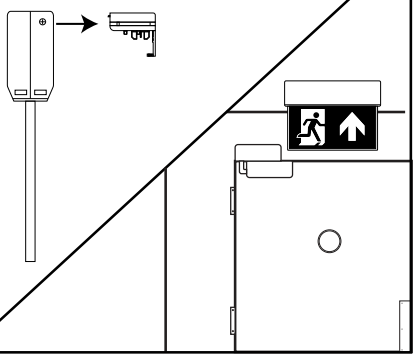

7 Self-test

OPTIONAL: set additional features via remote.

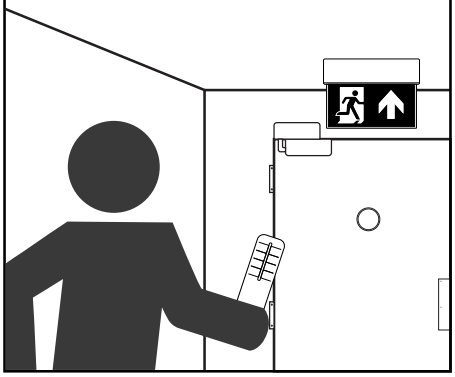

hello@fox-lux.co.uk
www.fox-lux.co.uk
+44(0)1543 396400
Fox Lux Ltd., Unit 17 Britannia Way, Lichfield WS14 9UY